




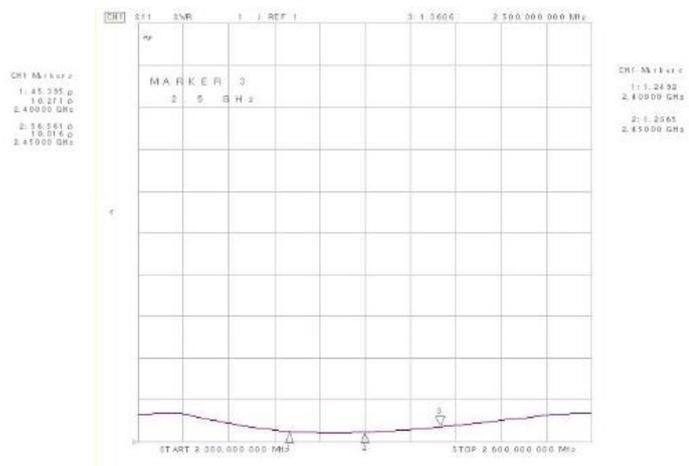

1	MHz frequency range:	2400-2500
2	Polarization:	Vertical
3	Koeff.usil. (DBI):	9
4	Impedance ( $\Omega$ ):	50
5	Maximum input power (W):	50
6	VSWR:	$\leq 2.0$
7	connector:	RPSMA-J
8	Length (mm):	378 +/- 5
9	Jacket Material:	ABS
10	sheath color:	black
11	Working temperature ( $^{\circ}$ C):	$(-30 \sim + 60)$
12	Humidity (%):	$5 \sim 95$

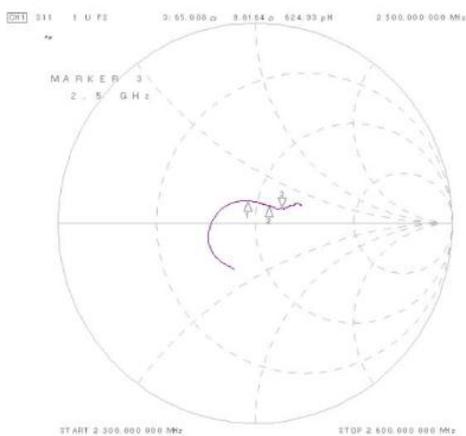

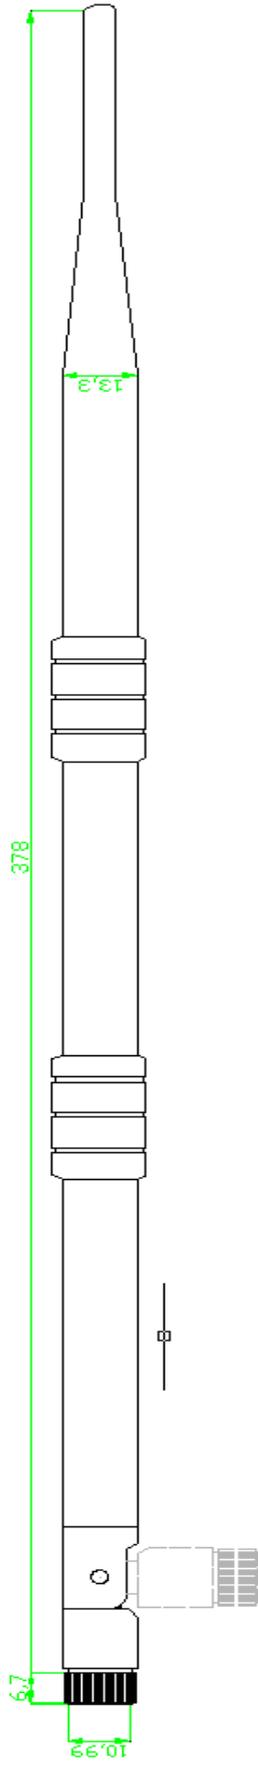

RUICHI