



ITEM: XT30 M+F

F

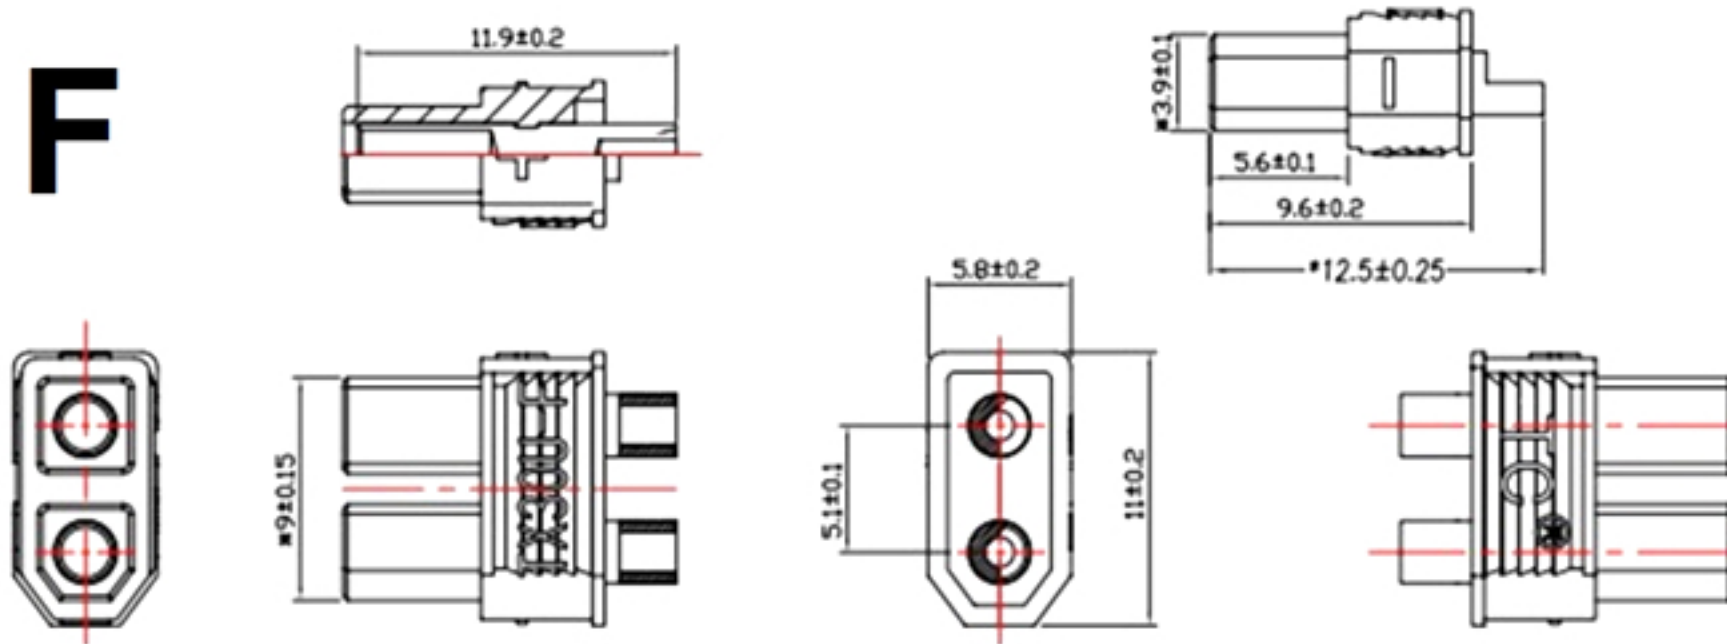

M

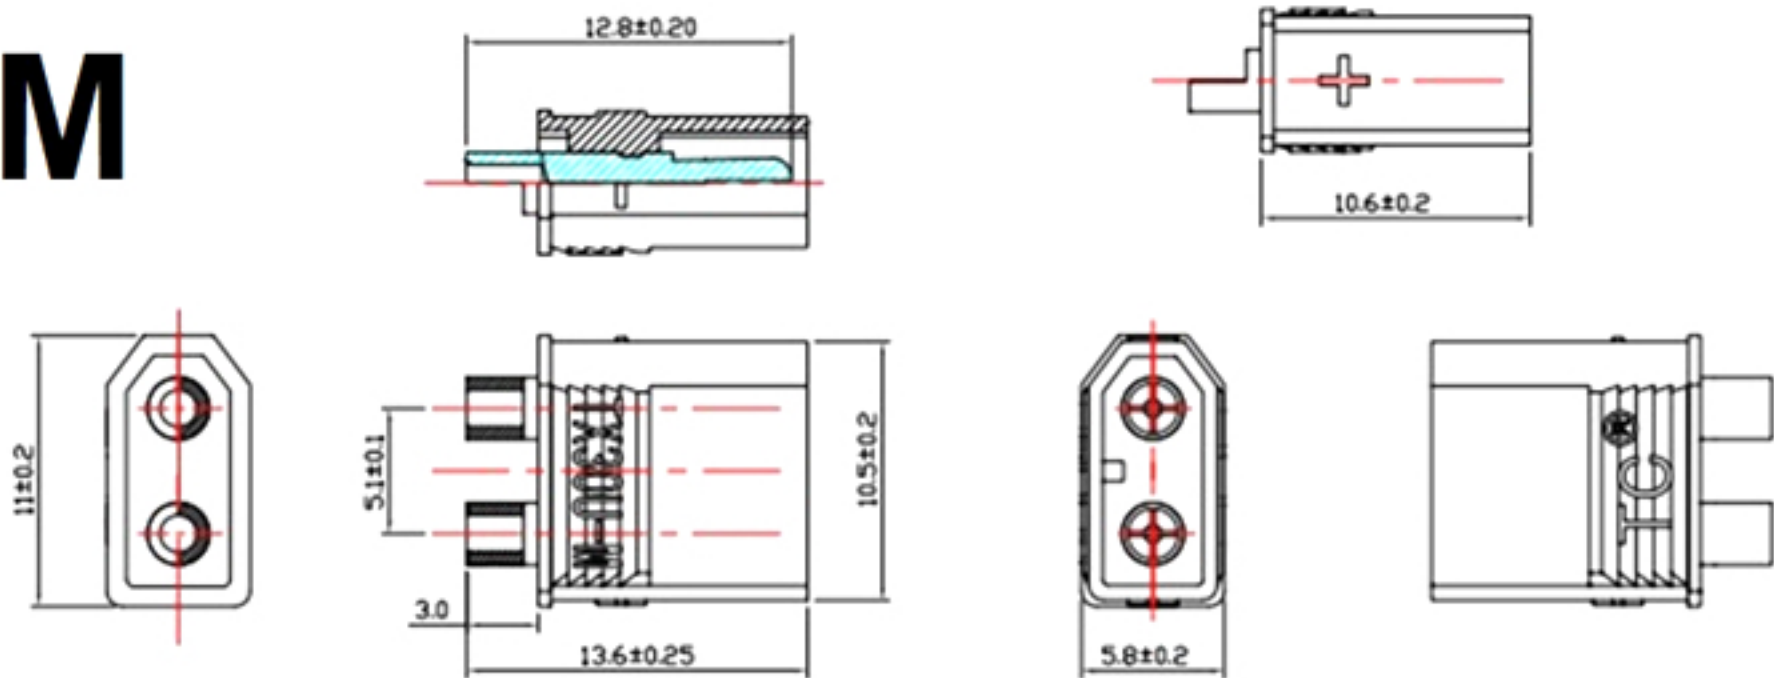

Product model: XT30 M+F
Instantaneous current: 30A
Rated current: 15A
Rated voltage: DC500V
Contact resistance: 0.55mΩ

Insulation material: PA
Working temperature: -20--120 degrees Celsius
Recommended wire gauge: 16AWG 18AWG
Recommended use times: 1000TIMES
Flame retardant rating: UL94VO

RUI CHI